

The Ribbon Sensor Tap 2.0




TSL.R021

Deck mounted sensor operated tap with robust body construction for all types of projects. To be used in conjunction with the Ribbon dryer and soap dispenser for optimum efficiency.

All taps and accessories from The Splash Lab are fully compatible with the Concept Washroom range. By specifying directly with us, you gain exclusive project pricing, expert guidance from our specification team, and dedicated support from start to finish.

Finish	Codes	LRV*
● Satin	TSL.R021.CS	58
● Black	TSL.R021.BK	3
● Brass	TSL.R021.BR	40
● Copper	TSL.R021.CP	19
● Bronze	TSL.R021.BZ	17
● Chrome	TSL.R021.C	75

*Light reflectance value

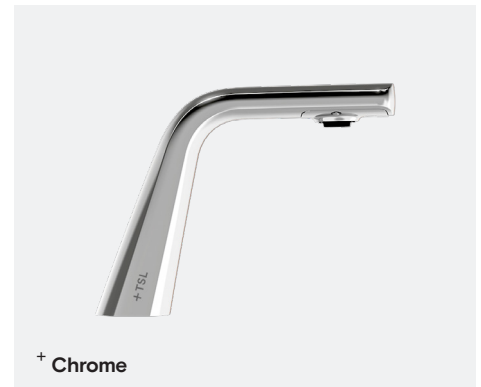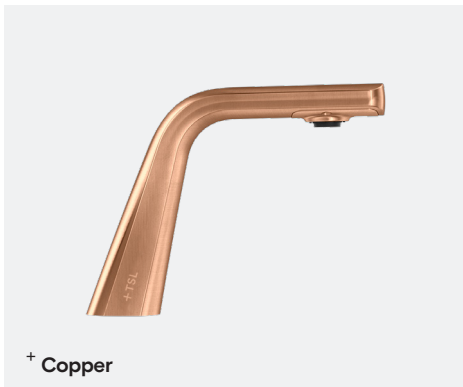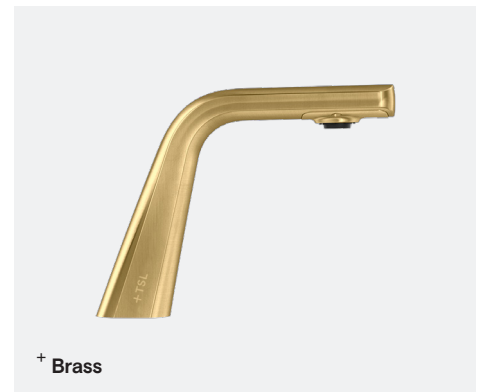

Technical Data

Weight	1.2kg
Minimum operating pressure	7-87 psi dynamic pressure
Flow rate	1.9 litres/minute - 3.8 litres/minute - 1.3 litres/minute optional
Stainless steel grade	304 Stainless steel
Sensor range	Preset 120±20mm (adjustable). Min range 50mm - Max range 150mm
Comfort delay	2 seconds
Security cut-o	60 seconds
Power supply - mains	Input: 100-240V ac; 50/60Hz Output: 6V DC; 0.5A,3W max

Installation requirements

Countertop Cut-out size	Ø32mm
Maximum Countertop thickness	35mm
Anti-rotation collar	Included
Refl ctive surfaces	Not to be installed above highly polished basins, or waste outlets
Access Requirements	Solenoids and transformers must be accessible at all times for servicing
Cabling	Low voltage push fit onnector to tap
Power supply	For the mains power option, it is recommended that the sensors are installed on their own circuit to avoid interference from other power demands.

Compliance & certifi ates

ASME A112.18.1	
CSA B125.1	
NSF/ANSI/CAN 61	
WRAS	
CE	
UKCA	
RoHS	
LEED	Water e ciency credits
BREEAM	Quali es for up to 5 credits as part of water e ciency assessment

BREEAM®



WRAS
WATER REGULATIONS ADVISORY SCHEME

Included

The Ribbon Sensor Tap
TSL.R021

Ribbon sensor faucet head

Mains power supply

Solenoid valve

Aerator Key
TSLP.260050

Anti-rotation plate #1

Counter top gasket


Anti-rotation plate #2

Fixing nut

Flow restrictor

Flex hose - 300mm

+ Technical drawing

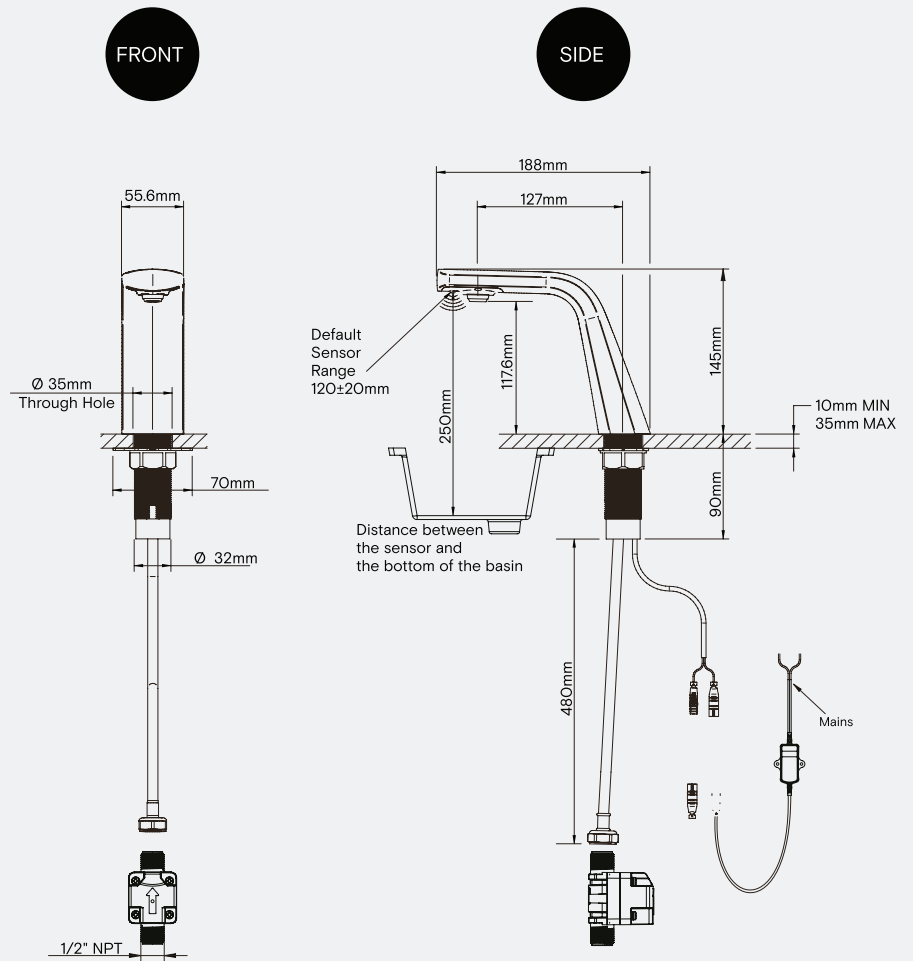

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Related products



Radius Auspex Tap 220mm
TSL.894



The Ribbon Soap Dispenser
TSL.R011



The Ribbon Hand Dryer
TSL.R031