

Concealed Shower with Rail

TSL.SHW.011




A minimalist stainless steel shower assembly with a two-way diverter for overhead, handheld flow and adjustable rail.

Components are concealed behind the finished wall and offered in four PVD colours as well brushed satin. - Doc M Compliant.

All taps and accessories from The Splash Lab are fully compatible with the Concept Washroom range. By specifying directly with us, you gain exclusive project pricing, expert guidance from our specification team, and dedicated support from start to finish.

Finish	Codes	LRV*
● Satin	TSL.SHW.011.CS	3
● Black	TSL.SHW.011.BK	40
● Brass	TSL.SHW.011.BR	58
● Copper	TSL.SHW.011.CP	17
● Bronze	TSL.SHW.011.BZ	19

*Light reflectance value



Technical Data - Shower Head

Body material	AISI304 Stainless steel
Coating Type	PVD (colours only)
Minimum Pressure	1 Bar
Maximum Pressure	10 Bar
Recommended Working Pressure	2 - 5 Bar
Maximum Water Temperature	70°C / 176°F
Maximum Recommended Water Temperature	65°C / 149°F
Flow Rates	Flow rate: 12L/pm standard - 6L/pm , 8L/pm & 9L/pm optional available

Technical Data - Handset


Body material	AISI304 Stainless steel
Coating Type	PVD (colours only)
Minimum Pressure	1 Bar
Maximum Pressure	10 Bar
Recommended Working Pressure	2 - 5 Bar
Maximum Water Temperature	70°C / 176°F
Maximum Recommended Water Temperature	65°C / 149°F
Flow Rates	Flow rate: 12L/pm standard - 6L/pm , 8L/pm & 9L/pm optional available

Included



Ribbon Sensor Tap head

+ Technical drawing

FRONT

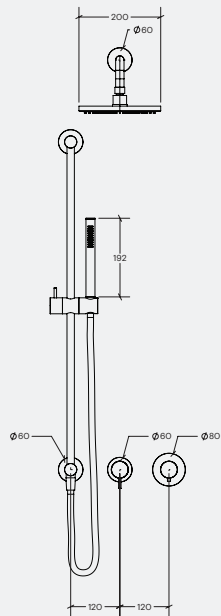

SIDE

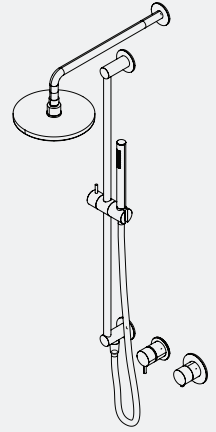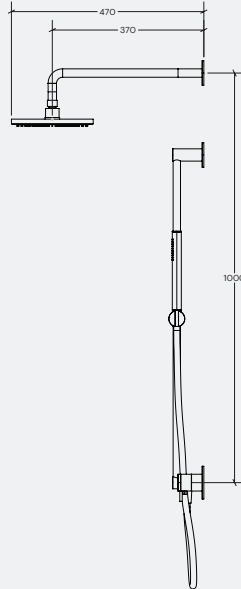


Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Related products



Wall Mounted Manual Tap
TSL.970



Radius Auspex 150mm
TSL.895



Concealed Shower
TSL.SHW.001